


MP-STA-12-32 - DCX NPM Code 24-200-3258

Single Board Windows CE Computer, 64 MB DRAM & 32 MB Flash mounted in an enclosure, 12" touch screen, AB MicroLogix 1200 PLC, 3-color stack light with horn and Ethernet connector.

This unit includes two 16-input and two 16-output cards wired to eight 5-pin DC micro connectors and three 8 I/O modular plug.

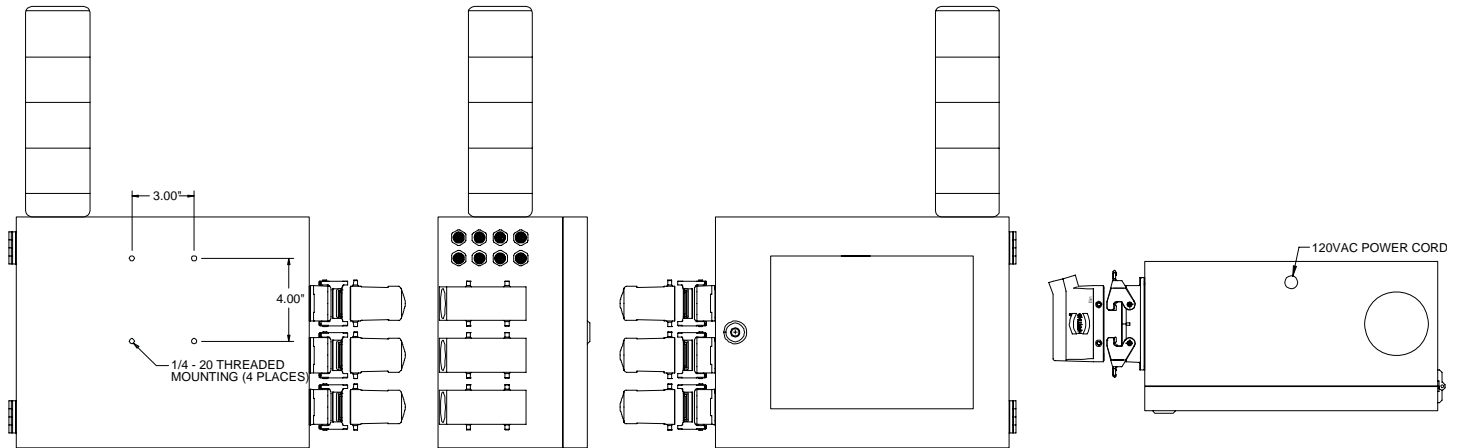

TECHNICAL SPECIFICATIONS	MODEL : MP-STA-12-32
Standards <ul style="list-style-type: none"> IEEE 802.3 10/100Mbps Fast Ethernet RS232 	Supported OS <ul style="list-style-type: none"> Windows CE
Interface <ul style="list-style-type: none"> (1) 10/100 Fast Ethernet Port (1)COM1: RS232, 3.3V CMOS, RS422, RS485 (8 wire) (1)COM2: RS232, 3.3V CMOS, IrDA (on-board or remote) (1)COM3: RS232, 3.3V CMOS (4 wire) (1) PCMCIA (Type I, II or III) 	Power <ul style="list-style-type: none"> 120 VAC 1.0 Amp Input 24 VDC 1.6 Amp Output
Dimensions (w x h x d) <ul style="list-style-type: none"> 14.15" x 11.15" x 7.24" 	Temperature <ul style="list-style-type: none"> Operating Temperature : 120°F(49°C) Operating Humidity : up to 95 %
Screen <ul style="list-style-type: none"> 12" Touch LCD Screen (9.80" x 7.38") 16 bit, XGA (1024x768) color LCD interface 	Safety <ul style="list-style-type: none"> UL
Processor <ul style="list-style-type: none"> 32-bit Digital XScale PXA255 RISC processor @400 MHz 	Weight <ul style="list-style-type: none"> Approx. 23 lbs
I/O <ul style="list-style-type: none"> Allen Bradley MicroLogix 1200 PLC (2) 16-point input card, 24VDC, Sinking (2) 16-point output card, 24VDC, Sourcing 	Warranty <ul style="list-style-type: none"> 1 year
Fuse <ul style="list-style-type: none"> KTK-R10, IR=200k AMPS 	Enclosure Rating <ul style="list-style-type: none"> NEMA 12
Mounting Holes <ul style="list-style-type: none"> 3" on center between holes –horizontal 4" on center between holes – vertical (4) ¼" 20 thread mounting holes 	Enclosure <ul style="list-style-type: none"> Color(s) : Reflex Blue Powder Coated